

TECTITE™

by "Apollo"

the ORIGINAL push fitting

Individually Packaged and Color Coded by Size.



FEATURES & BENEFITS

- Reduce lost time on jobs.
- Use in wet installations.
- Reduce repair interruption time.
- Removable Lead Free brass fittings in size 1/4" to 2".
- No special installation tools required.
- Quick and easy, removable and reusable installation.
- Ideal for service and repair, even on wet lines.
- EPDM O-Ring for leak free seals.
- Pre-lubricated for quick installation.
- Potable water and hydronic installation.
- AWWA C800 compliant 1 1/4" to 2".
- 50 Year Warranty*

TYPES OF PIPE TECTITE JOINS	COPPER	CPVC	PEX	PE	HDPE	PVC	NYLON
Small Diameter (1/4"-1")	✓	✓	✓	✓		✓	✓
Large Diameter (1 1/4"-2")	✓	✓	✓	✓	✓		✓

APPLICATIONS

Potable water, hot water and chilled water systems.*
For use in manufactured joints and behind walls without access panels.

*Further details on pressure code compliance and warranty available on our website.

PRODUCT SPECIFICATIONS

TECTITE by Apollo fittings and valves are pressure rated at 200 psi (13.8 bar) over a temperature range of 0° to 250°F (-18° to 121°C) with various liquids and gases.

TECTITE by Apollo hoses are pressure rated at 125 psi over a temperature range of 0°-150°F. TECTITE by Apollo fittings are manufactured with an EPDM O-ring seal, a Nylon guide ring and a 316 Stainless Steel grabring.

Contact our technical representatives for application specific information.

push.apollovalves.com

"Apollo" Piping Systems



IPS TRANSITION ADAPTER

- Smoothly transition from PVC to CU/CPVC/PEX.
- Connect to any TECTITE hose/fitting/valve (1/2"-1").
- Creates over 100 PVC transition possibilities.



POLYBUTYLENE TRANSITION COUPLING

- Easily transition from PB to CU/CPVC/PEX.
- Ideal for mobile homes with polybutylene systems.
- Great for repairs or re-piping.



ANGLE & STRAIGHT STOPS

- 1/4 turn.
- Compact design.
- Bridge installation on faucet risers.



New!

1 1/2" x 1" REDUCER COUPLING

- Transition from large to small diameter pipe in one step.
- Simply convert from HDPE tube to CU/CPVC/PEX.
- Large diameter (1 1/2") end offers full component replacement.



SLIP TEE

- Add branch for retro-fit applications.



TUBE CAP WITH DRAIN

- Inline drain capability.
- Multiple tube combos.
- Removable and reusable.



CORRUGATED HOSES

- 100% Stainless Steel.
- Full-flow connector (no flow restrictions).
- Perfect for boilers, water heaters and water softeners.
- Available in 12", 15", 18", 21" and 24".
- 2 Year Warranty.

PRESSURE REDUCING VALVE (1/2"-1")

- Made in the USA by Apollo Valves.
- Pair with **NEW** TECTITE™ Slip Adapter (shown below) to create Slip PRV.
- Factory set at 50 psi. Adjustable from 15-75 psi.

*SOLD SEPARATELY

SLIP ADAPTER (1/2"-1")

- Add capability to any existing TECTITE™ fitting.
- Especially appealing for use in ball valves & PRVs for retrofit applications.
- Eliminate "lay length" issues.

*SOLD SEPARATELY

WATER HEATER SOLUTIONS



THERMAL EXPANSION RELIEF VALVE

- One-of-a-kind push type valve, Made in USA.
- Replaces 4 products with one device.
- IAPMO IGC 128-2008 and NSF approved.

TANK TEE

New!

- Retrofit expansion tanks.
- No need to drain system for installation.




WATER HEATER INSTALLATION KIT

- Simplify water heater installation.
- Connect water distribution pipe in seconds.

LASCO®
Fittings, Inc.

LASCO® **PUSH**

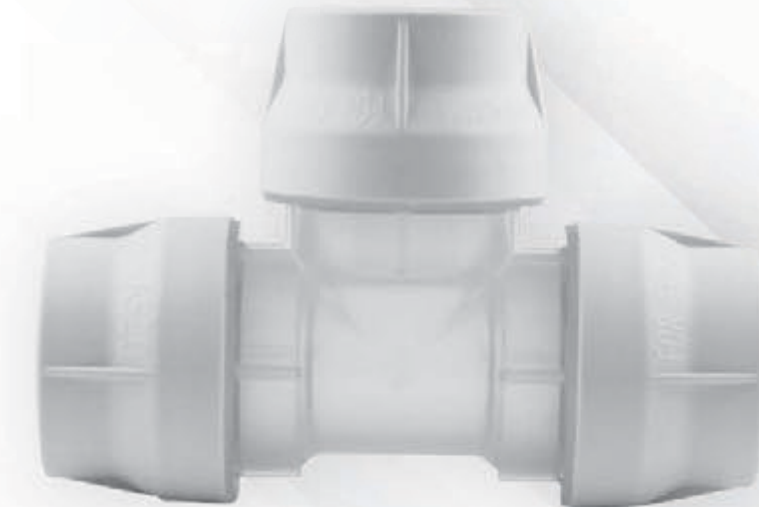


LASCO Fittings Inc. now has a quick and simple solution for your irrigation needs - Push Fittings for use with Schedule 40, Class 200 / SDR-21 or IPS Flex Pipe.

- Available in 1/2", 3/4" and 1" sizes.
- No Primer or Glue Required
- No VOCs
- Simply clean and de-bur the pipe and push on
- Can install wet - no need to empty water out of trenches
- Once installed, the fitting will rotate to easily line up tees and elbows
- Can be pressurized immediately - no need to wait
- Stainless Steel Retainer Ring for a permanent installation
- Max. working pressure: 140 psi
- For irrigation only - can be used on mainlines!
- Patent Pending

CLEAN INSTALLATION
No glues, fluxes or solder needed

FAST & SIMPLE
Easy push-fit installation.
No special tools.

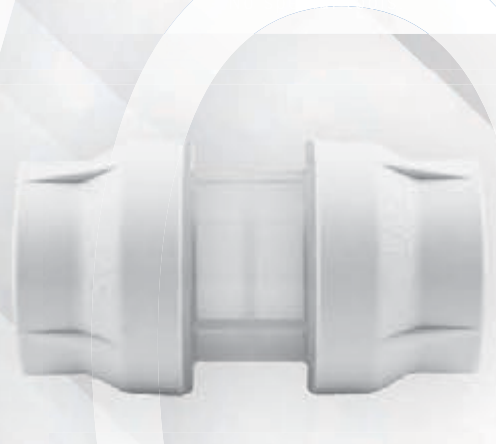

HEAT FREE
Reduces fire hazard.
Utilizes push-fit technology.

FAST & SIMPLE
Easy push-fit installation.
No special tools.

CLEAN INSTALLATION
No glues, fluxes or solder needed

NO CONSUMABLE MATERIALS
Reduces material cost
and storage

"Apollo" Piping Systems



COPPERLOC

Made in America non removable copper push fitting with a 50 year warranty. This helps join Copper, CPVC, or PEX with no tools, heat, glues, flux or solder required. They range from 1/2 to 1" size for potable water, hot and cold water systems. What sets these fittings apart from our Tectite fittings is that they can be used in underground applications as well as behind walls without an access panel since they are non-removable.



tectite.apollovalves.com

sizes from **1/4" TO 2"**

As part of the family of companies that invented the push fitting over 20 years ago, we are living up to our tradition of innovation. Our line extension now gives you more fittings for more applications. No other push fitting manufacturer offers both the size and breadth of the TECTITE™ line of push fittings.



E X T E N S I V E
PRODUCT LINE

TECTITE PRODUCT PORTFOLIO

- | | | |
|---|---|---|
| <ul style="list-style-type: none"> • Couplings • Reducer Couplings • Slip Couplings • Female Adapters • Reducing Female Adapters • Male Adapters • Reducing Male Adapters • 45° Elbows • 45° Street Elbows • 90° Elbows • 90° Reducing Elbows • 90° Female Elbows • 90° Male Elbows • 90° Drop Ear Elbows • 90° Hi Ear Elbows • Expansion Tank Tees | <ul style="list-style-type: none"> • Water Heater Kit • Water Heater Hose • Repair Hose • Check Valve • Angle Stops • Straight Stops • 1/4 - Turn Faucet Supply Lines • 1/4 - Turn Toilet Supply Lines • Pressure Reducing Valves • Tube Caps • Demount Clips • Demount Wrench • Fitting Adapters • Fitting Reducers • Dishwasher Elbows • Garden Hose Elbows | <ul style="list-style-type: none"> • Tees • Reducing Tees • Slip Tees • Female Center Slip Tees • Water Heater Hose w/ Ball Valve • Ball Valves • Female Ball Valves • Tube Caps with Drain • Ball Valves with Drain • Thermal Expansion Relief Valve • IPS Transition Adapter • Slip Adapters • Polybutylene Conversion Couplings • Y-Strainer |
|---|---|---|

Contractor packs available.

(See price list for details)

"Apollo" Flow Controls



www.apolloflowcontrols.com

customer service (704) 841-6000



PUSHTRI BRCH 02/17 2.500

TECTITE™

by "Apollo"



the
ORIGINAL
push fitting

"Apollo" Piping Systems